


Thermocouple pipe Clamp Style

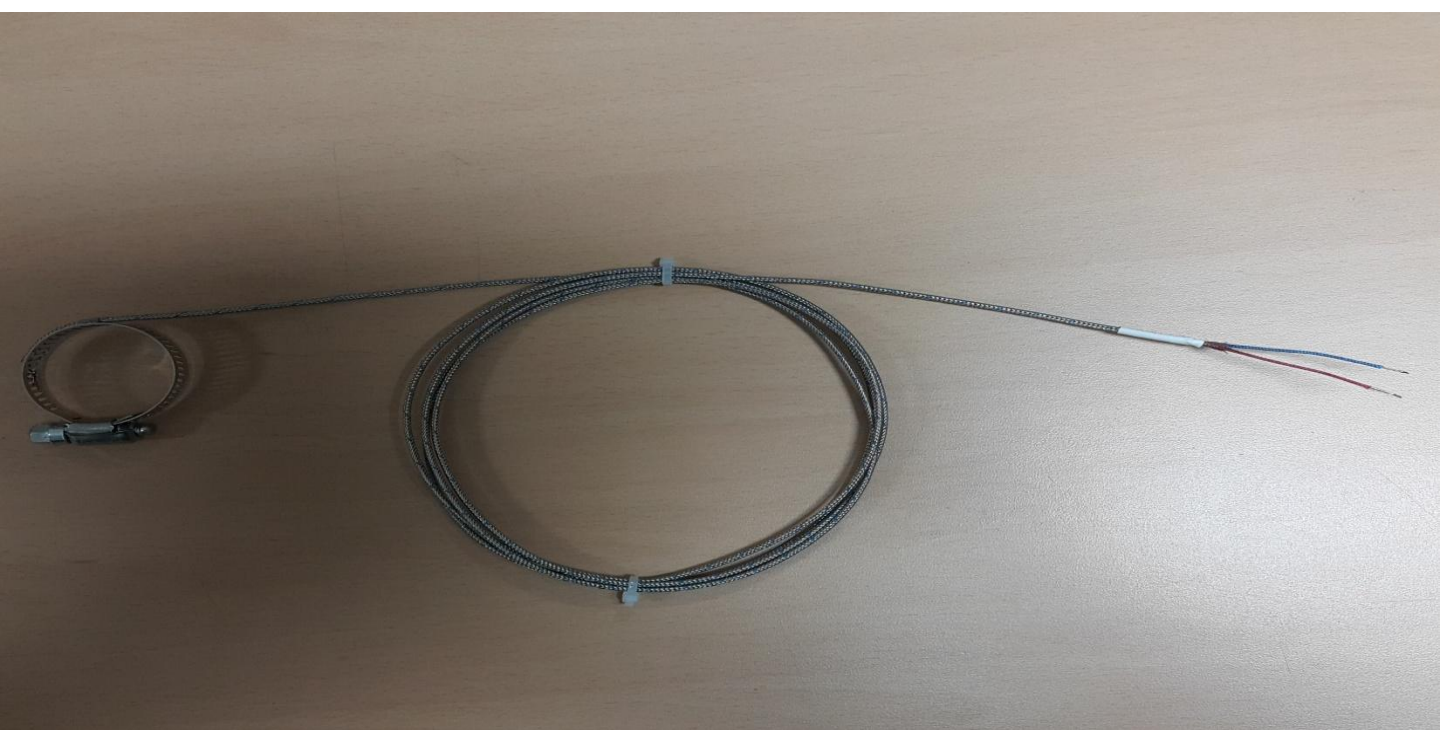

- **1-2.** Construction Style
- 10 = Pipe Clamp thermocouple
- **3.** Calibration
- K = K Type T = T Type J = J Type
- **4.** Lead Protection
- F = Fiberglass with stainless steel overbraid
- (0.65mm solid)
- G = Fiberglass with stainless steel overbraid
- (24 gauge stranded)
- P = PFA with stainless steel overbraid
- (24 gauge stranded)
- **5.** Junction
- G = Grounded
- **6.** Clamp Band Diameter (inches)
- A = 11/16 to 1 1/4
- B = 1 1/4 to 2 1/4
- C = 2 1/4 to 3 1/4
- D = 3 1/4 to 4 1/4
- E = 4 1/4 to 5 1/4
- **7.8 .9.** Lead Length (inches)
- Whole inches : 10 to 999
- **10.** Terminations/Options
- A = Standard,
- B = spade lugs
- C = Miniature male Plug
- D = Standard male Plug
- **1 2 3 4 5 6 7 8 9 10**
- **1 0 T GG A 7 2 0 A**